




PV Doctor: Inspection & Improving



The smart device to improve your plant yield

PV BOOSTER

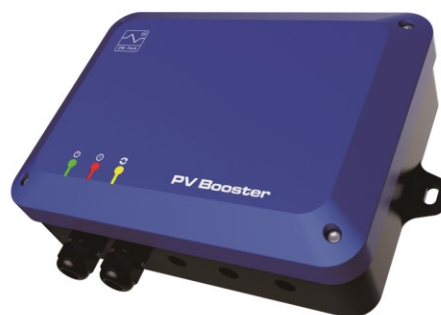

Zealwe Technology Co., Ltd.

Add: No. 60, Zhonghui Rd., Minhang District, Shanghai, China (201111)


Tel: +86-21-54322103 / 54322105

Email: info@zealwe.cn

zealwe.cn

What happened after several years running of plant?

PV Booster is used to improve the yield and improve your profit.

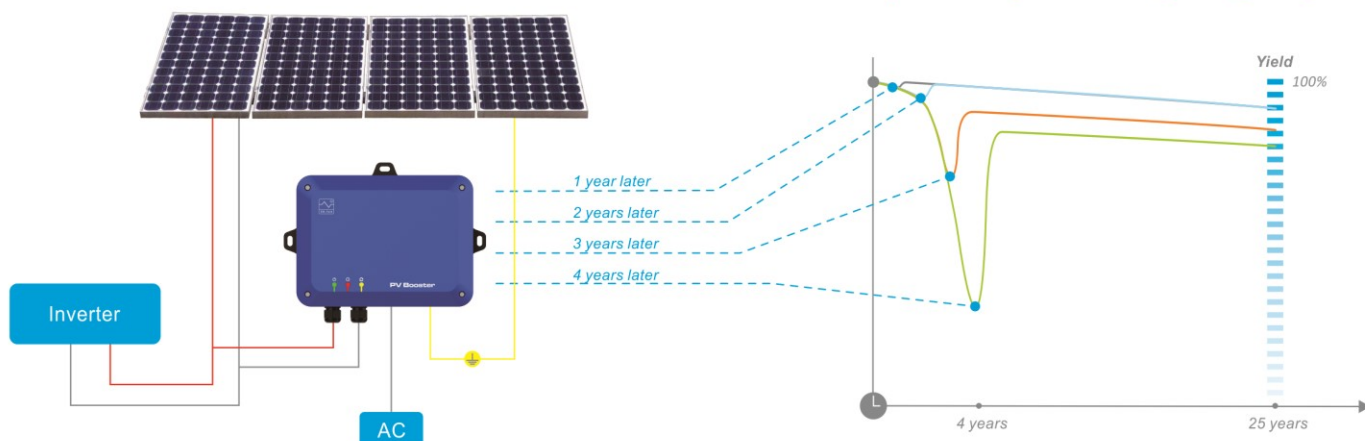

Data sheet

Item		PV Booster
Qty. of Inverter connecting with		1 (capacity of each inverter ≤ 30 kW)
General Data	Operating Temperature (°C)	-25 ~ 65
	Operating Humidity (%RH)	≤ 95
	Dimension (mm)	260×240×76
	Weight (kg)	<2kg
	Certification	CE
	Altitude (m)	≤ 4.000
Control Method	Control method	Clock / Module voltage
	Display	LED
	Operating	None
DC Output	Voltage (V)	200 ~ 1000
	Voltage Resolution (V)	1
	Rated current (mA)	8
	Rated Power (W)	8
	Permit Insulating Resistance (KΩ)	25
AC Input	Voltage (V)	100 ~ 250
	Frequency (Hz)	50 / 60
	Ground Cable	Optional
Module Voltage (V)		0 ~ 1000
IP class		IP65
Communication (optional)		Fault Relay
Warranty (year)		2

Zealwe Technology Co., Ltd.

Add: No. 60, Zhonghui Rd., Minhang District, Shanghai, China (201111)

Tel: +86-21-54322103 / 54322105

Email: info@zealwe.cn

zealwe.cn